

**KIP 970** 

**KIP 980** 

**KIP 990** 

The Faster, Smarter, More Efficient

KIP 900 COLOR SERIES

**Faster** The most advanced high demand wide format color print system, delivers consistent productivity.

**Smarter** Brilliant multi-tasking with KIP Smart multi-function touchscreen and KIP Image Pro software, which is intelligently integrated with all KIP Accessories.

More Efficient KIP 900 Series technology lowers operating costs.



## Productivity

- Color Printing 5,760 Sq. Ft. per Hour
- Black & White Printing 7,200 Sq. Ft. per Hour
- KIP ImagePro


### Design

- 4 Roll with 7,800 Sq. Ft. Media Capacity
- High Capacity Toner Cartridges
- Professional Edge Alignment Stacking

## Configurations

- High Demand Dual Footprint Design
- Production or Convenience Scanning



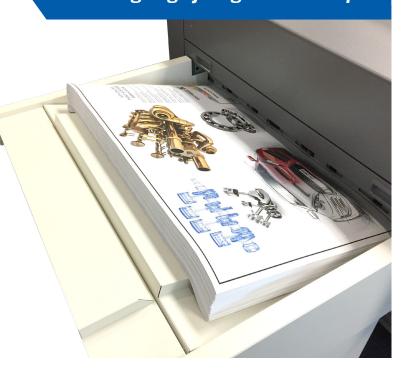



# HIGH DEMAND CONSISTENT PRODUCTIVITY

## Engineered to deliver:

- Superb Print Quality
- Reliable Performance
- Efficient Operation
- Remarkable Value

The KIP 900 Color Series systems are designed for print centers that require high demand output, precise imaging and bold, expressive color fidelity.


KIP 900 Color Series systems produce amazingly vibrant colors, subtle tints and hues with unsurpassed color stability from the first to final print.


All prints and copies generated by the KIP 900 Color Series systems deliver the highest image durability and are fully lightfast; they will not fade or exhibit color deterioration from exposure to light over extended periods. The CMYK dry toner system employed by the KIP 900 Color Series produces 100% waterproof images that are suitable for outdoor applications, even in inclement weather.

The KIP 900 Color Series systems are a comprehensive wide format solution for a range of printing tasks spanning from architectural, engineering and construction documents — to maps, posters and signs — without sacrificing quality or performance.





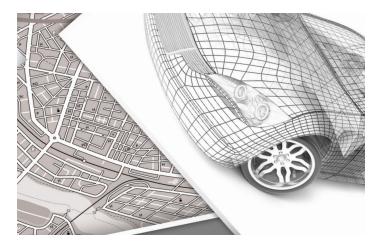

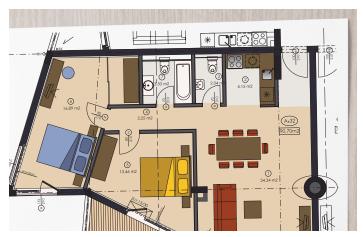





# HIGH DEMAND KIP 900 | COLOR SERIES

# KIP 970 🗘

High demand multi-touch color print system

#### Transforms High Demand Print Efficiency

- · High demand network production print system
- 4 x 650 foot rolls
- 7,800 square foot media capacity
- 7,200 square feet per hour black & white productivity
- 5,760 square feet per hour color productivity
- · High capacity toner cartridges
- 12" Smart System K multi-function touchscreen
- Professional edge alignment stacking
- KIP System K 2.0 with KIP ImagePro
- Robust build quality for maximum reliability





# KIP 980 🗘

## High demand color multi-function system

#### Intelligently Accelerates Productivity

- High demand multifunction production print system with KIP 720 CIS convenience scanner
- 4 x 650 foot rolls
- 7,800 square foot media capacity
- 7,200 square feet per hour black & white productivity
- 5,760 square feet per hour color productivity
- High capacity toner cartridges
- 12" Smart System K multi-function touchscreen
- Professional edge alignment stacking
- KIP System K 2.0 with KIP ImagePro
- Robust build quality for maximum reliability

# KIP 990 🗘



## High demand color multi-function system

#### Brilliantly Advanced Multifunction Production Performance

- High demand multifunction production print system with KIP 2300 CCD production scanner
- 4 x 650 foot rolls
- 7,800 square foot media capacity
- 7,200 square feet per hour black & white productivity
- 5,760 square feet per hour color productivity
- High capacity toner cartridges
- 12" Smart System K multi-function touchscreen
- Professional edge alignment stacking
- KIP System K 2.0 with KIP ImagePro
- Robust build quality for maximum reliability

## High Demand KIP 900 Color Series

# **TECHNOLOGY HIGHLIGHTS**

#### **Consistent Productivity**

- Single Pass Black
- Full Color

**Professional Edge Alignment Stacker** 

**Enhanced Drivetrain Performance** 

**Page Accuracy** 

**Expanded Media Capacity** 

**High Capacity Toner Cartridges** 

**Permanent High Definition Print Head** 

**Quick Switch Technology** 

**KIP ImagePro Print Management Suite** 





#### KIP ImagePro

KIP ImagePro is a single software solution designed to simplify every stage of color and black & white wide format workflow.



#### Consistent Productivity

High quality single pass black and full color images at consistent print speed. The KIP 900 Series technology lowers operational costs. Print image is lightfast, waterproof and does not smear when using mark-up highlighters.



#### **Production Printing**

The KIP 900 Color Series print systems offer superb high quality resolution at remarkable consistent print speeds of up to 7,200 square feet or 670 m $^2$  per hour, in black & white or 5,760 square feet or 535 m $^2$  per hour, in color.



#### Professional Edge Alignment

Professional edge alignment stacking reduces post printing interaction.



#### Quick Switch Technology

Mixed print size sets at full production speed. The KIP 900 Color Series print technology eliminates roll switching delays for increased productivity.



#### Expanded Media Capacity

An ergonomic roll cap system simplifies the process of loading the 7,800 square foot  $/\ 725\ m^2$  media capacity.



#### Large Capacity Toner

Each CMYK cartridge contains 1,500 gms of toner for a total capacity of 6,000 gms - allowing longer uninterrupted color and black & white print runs for continuous system productivity.



#### Automatic Calibration

For color images that compliment the highest standards, an exclusive single belt imaging system performs automatic calibrations for precise imaging and bold, expressive color output.



# One Application for all Wide Format Imaging









KIP ImagePro is a single software solution designed to simplify every stage of color and black & white wide format workflow.

## **STANDARD MODE**

- Fast and Easy Print Control
- Quick Access Tool Bar
- Column Logic
- · High Definition Viewer
- Image Clean Up
- Area of Interest

## **EXPANDED MODE**

Features for Technical Production and Color Graphic Professionals:

- Color Management
- Nest, 2 Up, Paneling
- Job Validation
- Customizable Interface Pop Out
- Flexibility in System Configurations



#### **KIP 70 Series**



#### KIP 70 and KIP Color Series Multi-touch Solutions

- Copy & Scan to Local/USB/LAN/Cloud (MFP)
- Print from Local/USB/LAN/Cloud
- Super View with Area of Interest
- Cloud Connect
- Data Security
- Smart Scan
- KIPFold Control


#### **OPTIONS:**

- Removable HD
- Card Reader



**MFP** 

**Printer** 

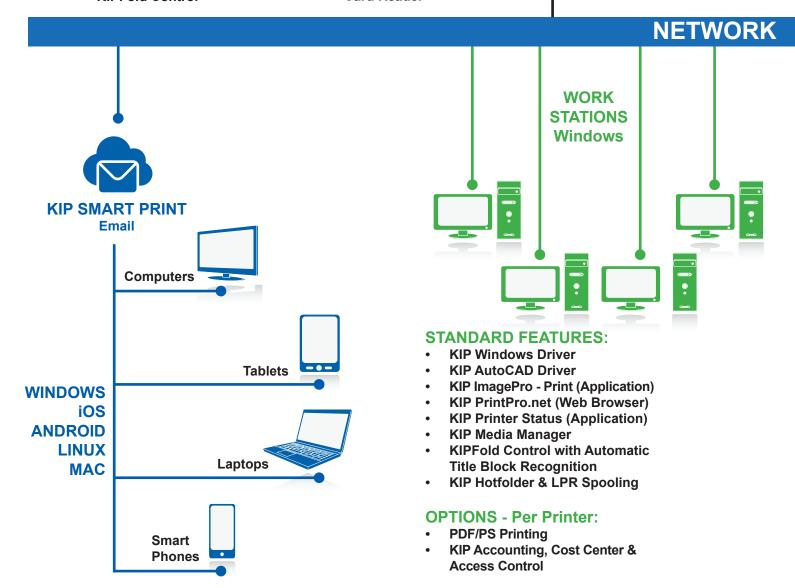

## **Systems Diagram**

#### **KIP Color Series**



**MFP** 

**Printer** 



**MFP** 

**Printer** 

**FEATURES**:

KIP PrintPro.Net

KIP Hotfolder Support

(Web Browser)


LPR Spooling

### **KIP Scan Systems** Scan, Copy & Print



#### KIP ImagePro - Scan & Copy:

- Scan Local/USB/LAN/Cloud
- Copy To KIP Color or B&W printer
- Print To KIP Color or B&W printer
- **Color Adjustment / Management**
- **High Definition Viewer**
- Area of Interest
- **KIPFold Control**



#### **STANDARD FEATURES:**

- KIP PrintPro.Net (Web Browser)
- PostScript Printer **Description File**
- **KIP Hotfolder Support**
- **LPR Spooling**

# KIP DIGITAL DATA SECURITY



#### **STANDARD FEATURES:**

- **Image Overwrite**
- **Removable Hard Disk Drive Accessory Kit**
- Standard Security Updates
- **KIP Secure Print**
- **KIP Accounting Center Integration**

### **Comprehensive KIP System K features are** available in the following brochures:

- **KIP Multi-touch Solutions**
- **KIP PC & Web Print Solutions**
- KIP Admin, Accounting & Access Control

# KIP 900 Color Series Specifications

4 Roll Color and Black & White Printer	Color and black & white printer with intelligent KIP System K touchscreen
4 Roll Color and Black & White Print/Copy/STF	Color and black & white printer with intelligent KIP System K touchscreen for Print/Copy and STF functions
System Scanners	KIP 980: KIP 720 CIS Scanner / KIP 990: KIP 2300 CCD Scanner
Scanner Stand	KIP 720 / KIP 2300 Scanner Stand (for the KIP 980-990 or optional for stand-alone scan applications)
Stacking Systems (standard)	KIP 900 Stacker
Finishing Systems (optional)	KIPFold 2800
Description	High production color and black & white wide format print/copy/scan
Туре	LED Array Electro photography with organic photoconductor (OPC drum) Contact Development using non magnetic mono-component toner
Configurations	Printer or multi-function system (print/copy/scan)
Speed	Up to 7,200 sq. ft (670 m²) in single pass black or 5,760 sq. ft. (535 m²) per hour in color regardless of image type or print resolution
Print Production	20 D size prints per minute in black & white, 16 D size prints per minute in color
Warm Up Time	Instant from standby, less than 4 minutes from power on
Toner	Four color (CMYK), dry toner, print images are UV resistant and waterproof
Input Power	North America: 2x 208-240VAC +6%/-10% 50/60Hz, 16 A EU/UK: 2x 220-240 V, 50/60 Hz, 16 A
Power Consumption	Printing 2.4 kWh (Average), Ready 630 W (Average), Sleep Mode 3.4 W
Acoustic Noise	< 65 db (printing), < 60 db (standby) (ISO 7779)
Ozone	< 0.05 ppm (average of 8 hours)
Dimensions	KIP 970 60" x 43" x 48" / 1500 x 1080 x 1220 mm (W x D x H) KIP 980 78" x 43" x 48" / 1970 x 1080 x 1220 mm (W x D x H) KIP 990 78" x 43" x 48" / 1970 x 1080 x 1220 mm (W x D x H)
Weight	1,212 lbs / 550 kgs NOTE: Weight of the optional scanner or stacker is not included
Printer	
Print Resolution	600 x 1,800 dpi
Paper Capacity	7,800 sq ft / 724 sq m ( 4 rolls + cut sheet )
Output Sizes Width (roll media)	11" - 36" / 297 mm - 914 mm (3" Core)
Output Sizes Length (roll media)	8.5" / 210 mm minimum, 210' / 64 m maximum (actual length may be dependent on media type and file type limitations)
Paper Weight (roll media)	See KIP Media Guide
Sheet Bypass	Up to 40 lbs. / 150 gsm bond   Maximum sheet size 36"/ 914 mm x manageable length   Minimum sheet size 11" x 17" / A3
One of Bypass	op to 40 lbs. / 150 gsill bolid   Maximum sheet size 50 / 514 min x manageable length   Minimum sheet size 11 x 11 / A5
Media Types	See KIP Media Guide
Media Types	
Media Types  Scanner / Copier  Resolution	See KIP Media Guide  600 dpi (optical)
Media Types  Scanner / Copier	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up
Media Types  Scanner / Copier  Resolution  Original	See KIP Media Guide  600 dpi (optical)
Media Types  Scanner / Copier Resolution Original Widths Length	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)
Media Types  Scanner / Copier Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7' / 210 mm - 6 m
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7' / 210 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7' / 210 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7' / 210 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)  16 GB (min)
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7' / 210 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory Solid State Drive	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7' / 210 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)  16 GB (min)  Minimum 256 GB (Upgradable)  Raster Color: TIFF, JPG, JPG2000, PNG, BMP, GIF, TGA, RLE/RLC  Vector Color/B&W: HPGL, HPGL/2, HP-RTL, Postscript (PS/EPS), PDF, Autodesk DWF, Multipage PDF & DWF  Raster B&W: TIFF Group 3 & 4, CALS Group 4, Grayscale TIFF  Vector B&W: Calcomp 906/907
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory Solid State Drive  Compatible File Formats	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7' / 210 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)  16 GB (min)  Minimum 256 GB (Upgradable)  Raster Color: TIFF, JPG, JPG2000, PNG, BMP, GIF, TGA, RLE/RLC  Vector Color/B&W: HPGL, HPGL/2, HP-RTL, Postscript (PS/EPS), PDF, Autodesk DWF, Multipage PDF & DWF  Raster B&W: TIFF Group 3 & 4, CALS Group 4, Grayscale TIFF  Vector B&W: Calcomp 906/907
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory Solid State Drive  Compatible File Formats	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7' / 210 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)  16 GB (min)  Minimum 256 GB (Upgradable)  Raster Color: TIFF, JPG, JPG2000, PNG, BMP, GIF, TGA, RLE/RLC Vector Color/B&W: HPGL, HPGL/2, HP-RTL, Postscript (PS/EPS), PDF, Autodesk DWF, Multipage PDF & DWF Raster B&W: TIFF Group 3 & 4, CALS Group 4, Grayscale TIFF Vector B&W: Calcomp 906/907  ental Requirements
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory Solid State Drive  Compatible File Formats  Space, Electrical & Environm	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7' / 210 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)  16 GB (min)  Minimum 256 GB (Upgradable)  Raster Color: TIFF, JPG, JPG2000, PNG, BMP, GIF, TGA, RLE/RLC Vector Color/B&W: HPGL, HPGL/2, HP-RTL, Postscript (PS/EPS), PDF, Autodesk DWF, Multipage PDF & DWF Raster B&W: TIFF Group 3 & 4, CALS Group 4, Grayscale TIFF Vector B&W: Calcomp 906/907   ental Requirements  132" x 182" / 3350 mm x 4610 mm ( W x D ) (KIP 900 Series with stacker)  The flexibility of the KIP 980 / 990 system permits the scanner to be placed perpendicular or parallel to the KIP printer for individual workflow
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory Solid State Drive  Compatible File Formats  Space, Electrical & Environm  Total Space (minimum)	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7" / 210 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, I7 Quad Cord (min)  16 GB (min)  Minimum 256 GB (Upgradable)  Raster Color; TIFF, JPG, JPG2000, PNG, BMP, GIF, TGA, RLE/RLC Vector Color/B&W: HPGL, HPGL/2, HP-RTL, Postscript (PS/EPS), PDF, Autodesk DWF, Multipage PDF & DWF Raster B&W: TIFF Group 3 & 4, CALS Group 4, Grayscale TIFF Vector B&W: Calcomp 906/907   ental Requirements  132" x 182" / 3350 mm x 4610 mm (W x D) (KIP 900 Series with stacker)  The flexibility of the KIP 980 / 990 system permits the scanner to be placed perpendicular or parallel to the KIP printer for individual workflow which can result in special requirements that may differ than noted above.  KIP 970 = Dual 208 V - 240 V 50/60 Hz, 16 A  KIP 980 / 990 = North America - the above, plus one 110 V - 120 V 50/60 Hz, 6 A or higher (for KIP scanner)  EU & UK - three 220V - 240V 50/60 Hz 16A (for printer and scanner)  North America = two NEMA 6-20 R (plus one NEMA 5-20 R for the KIP 980 / 990)  Europe = CEE 7 (x3 for KIP 980 / 990)  UK = BS 546 (x3 for KIP 980 / 990)
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory Solid State Drive  Compatible File Formats  Space, Electrical & Environm  Total Space (minimum)  Electrical Requirements  Electrical Receptacle	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7" / 210 mm - 9 mm - 6 m  er and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)  16 GB (min)  Minimum 256 GB (Ugradable)  Raster Color: TIFF, JPG, JPG2000, PNG, BMP, GIF, TGA, RLE/RLC Vector Color/B&W: HPGL, HPGL/2, HP-RTL, Postscript (PS/EPS), PDF, Autodesk DWF, Multipage PDF & DWF Raster B&W: TIFF Group 3 & 4, CALS Group 4, Grayscale TIFF Vector B&W: Calcomp 906/907   ental Requirements  132" x 182" / 3350 mm x 4610 mm ( W x D ) (KIP 900 Series with stacker)  The flexibility of the KIP 980 / 990 system permits the scanner to be placed perpendicular or parallel to the KIP printer for individual workflow which can result in special requirements that may differ than noted above.  KIP 970 = Dual 208 V - 240 V 50/60 Hz, 16 A  KIP 980 / 990 = North America - the above, plus one 110 V - 120 V 50/60 Hz, 6 A or higher (for KIP scanner)  EU & UK - three 220V - 240V 50/60 Hz 16A (for printer and scanner)  North America = two NEMA 6-20 R (plus one NEMA 5-20 R for the KIP 980 / 990)  Europe = CEE 7 (X3 for KIP 980 / 990)  All other regions = please refer to your local standards
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory Solid State Drive  Compatible File Formats  Space, Electrical & Environm  Total Space (minimum)  Electrical Requirements  Electrical Receptacle  Network Port	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7" / 210 mm - 6 m  or and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)  16 GB (min)  Minimum 256 GB (Upgradable)  Raster Color: TIFF, JPG, JPG2000, PNG, BMP, GIF, TGA, RLE/RLC Vector Color/B&W: HPGL, HPGL/2, HP-RTL, Postscript (PS/EPS), PDF, Autodesk DWF, Multipage PDF & DWF Raster B&W: TIFF Group 3 & 4, CALS Group 4, Grayscale TIFF Vector B&W: Calcomp 906/907   ental Requirements  132" x 182" / 3350 mm x 4610 mm ( W x D ) (KIP 900 Series with stacker)  The flexibility of the KIP 980 / 990 system permits the scanner to be placed perpendicular or parallel to the KIP printer for individual workflow which can result in special requirements that may differ than noted above.  KIP 970 = Dual 208 V - 240 V 50/60 Hz, 16 A  KIP 980 / 990 = North America - the above, plus one 110 V - 120 V 50/60 Hz, 6 A or higher (for KIP scanner)  EU & UK - three 220V - 240V 50/60 Hz, 16A (for printer and scanner)  North America = two NEMA 6-20 R (plus one NEMA 5-20 R for the KIP 980 / 990)  Europe = CEE 7 (x3 for KIP 980 / 990)  EUR = BS 546 (x3 for KIP 980 / 990)  UK = BS 546 (x3 for KIP 980 / 990)  All other regions = please refer to your local standards  RJ-45 port-CAT5 or higher. LAN rated at least at 100 mb. Recommended is 1000 mb
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory Solid State Drive  Compatible File Formats  Space, Electrical & Environm  Total Space (minimum)  Electrical Requirements  Electrical Receptacle  Network Port Room Temperature	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7" / 210 mm - 6 m  or and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, I7 Quad Cord (min)  16 GB (min)  Minimum 256 GB (Upgradable)  Raster Color: TIFF, JPG, JPG2000, PNG, BMP, GIF, TGA, RLE/RLC  Vector Color/JB&W: HPGL, HPGL/2, HP-RTL, Postscript (PS/EPS), PDF, Autodesk DWF, Multipage PDF & DWF  Raster B&W: Calcomp 906/907   ental Requirements  132" x 182" / 3350 mm x 4610 mm ( W x D ) (KIP 900 Series with stacker)  The flexibility of the KIP 980 / 990 system permits the scanner to be placed perpendicular or parallel to the KIP printer for individual workflow which can result in special requirements that may differ than noted above.  KIP 970 = Dual 208 V - 240 V 50/60 Hz, 16 A  KIP 980 / 990 = North America - the above, plus one 110 V - 120 V 50/60 Hz, 6 A or higher (for KIP scanner)  EU & UK - three 220V - 240V 50/60 Hz 16A (for printer and scanner)  North America = two NEMA 6-20 R (plus one NEMA 5-20 R for the KIP 980 / 990)  Europe = CEE 7 (x3 for KIP 980 / 990)  UK = BS 546 (x3 for KIP 980 / 990)  All other regions = please refer to your local standards  RJ-45 port-CAT5 or higher. LAN rated at least at 100 mb. Recommended is 1000 mb  50-86*F / 10-30*C
Media Types  Scanner / Copier  Resolution Original Widths Length Please see the KIP 2300 Production CCD Scanne  Controller Controller Type Memory Solid State Drive  Compatible File Formats  Space, Electrical & Environm  Total Space (minimum)  Electrical Requirements  Electrical Receptacle  Network Port	See KIP Media Guide  600 dpi (optical)  Single Sheet, image viewable/face up  8.5" - 36" / 210 mm - 914 mm (international standard page sizes to include ANSI, ARCH, ISO A & B, CHN, JPN)  8.5" - 19.7" / 210 mm - 6 m  or and KIP 720 CIS Convenience Scanner documentation for additional specification details.  System K Embedded, Windows Standard Embedded 10 - 64 bit, i7 Quad Cord (min)  16 GB (min)  Minimum 256 GB (Upgradable)  Raster Color: TIFF, JPG, JPG2000, PNG, BMP, GIF, TGA, RLE/RLC Vector Color/B&W: HPGL, HPGL/2, HP-RTL, Postscript (PS/EPS), PDF, Autodesk DWF, Multipage PDF & DWF Raster B&W: TIFF Group 3 & 4, CALS Group 4, Grayscale TIFF Vector B&W: Calcomp 906/907   ental Requirements  132" x 182" / 3350 mm x 4610 mm ( W x D ) (KIP 900 Series with stacker)  The flexibility of the KIP 980 / 990 system permits the scanner to be placed perpendicular or parallel to the KIP printer for individual workflow which can result in special requirements that may differ than noted above.  KIP 970 = Dual 208 V - 240 V 50/60 Hz, 16 A  KIP 980 / 990 = North America - the above, plus one 110 V - 120 V 50/60 Hz, 6 A or higher (for KIP scanner)  EU & UK - three 220V - 240V 50/60 Hz, 16A (for printer and scanner)  North America = two NEMA 6-20 R (plus one NEMA 5-20 R for the KIP 980 / 990)  Europe = CEE 7 (x3 for KIP 980 / 990)  EUR = BS 546 (x3 for KIP 980 / 990)  UK = BS 546 (x3 for KIP 980 / 990)  All other regions = please refer to your local standards  RJ-45 port-CAT5 or higher. LAN rated at least at 100 mb. Recommended is 1000 mb

## KIP 900 Color Series Accessories

#### Stacker

The KIP 900 Color Series professional edge alignment stacker reduces post printing interaction, improving the efficiency and workflow. Neatly stacks a multitude of various page sizes. Unattended print runs can be scheduled with peace of mind.



#### KIPFold 2800

The KIPFold 2800 system automates wide format document folding requirements by providing folding, stacking and collation in a compact design. KIP online folders intelligently communicate with KIP printers and are fully integrated with KIP software applications & print drivers to provide seamless workflow integration.

Optional for KIP 970, 980, 990



#### Copying & Scanning

The KIP 900 Color Series delivers efficient, high speed hard copy reproduction workflow. Exceptional image quality is achieved through true 600 x 600 dpi optical resolution via a choice of integrated KIP scanners, with advanced optics and delicate original transport processes for pixel-perfect images.

KIP 720 scanner included with KIP 980 KIP 2300 scanner included with KIP 990





# LOW EMISSIONS - HIGH EFFICIENCY

- KIP products all have a variety of sleep modes and power usage timers to reduce power consumption. All KIP systems are Energy Star qualified.
- · During operation, the power consumption of KIP products are one of the lowest in the industry, thanks to efficiency in design.
- KIP's manufacturing processes have reduced electricity consumption by 33%, all while increasing productivity.









KIP.COM/GREEN FOR MORE INFORMATION



WWW.KIP.COM | 800.252.6793